




24 - 25EE(GAP)

SYEC CORE

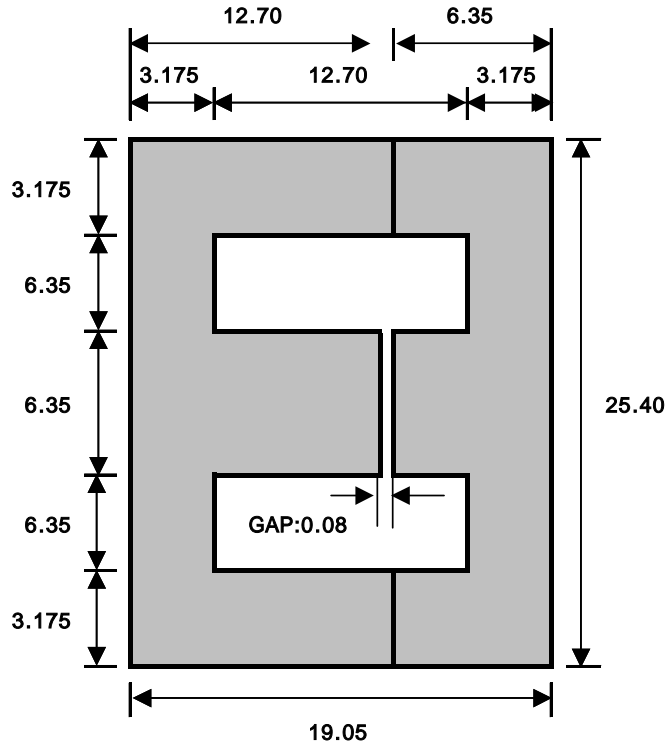

TOLERANCE ± 0.08

PROPERTIES OF SQUARE STACK

MAGNETIC DESIGN FORMULAE

$$B_{max} = \frac{931 \cdot 10^3}{K_1 N} \text{ gauss per Volt at 60Hz}$$

(N is number of turns)

$$H_0 = (0.247 \cdot 10^{-3}) \text{ N Oersted per milliampere of direct current in winding}$$

$$L = (0.0996 \cdot 10^{-8}) K_1 N^2 \mu \text{ ac Henries}$$

MAGNETIC PATH DIMENSION

$$l = 5.08 \text{ cm}$$

$$A = 0.403 \text{ cm}^2$$

K₁ (STACKING FACTOR)

Thickness	Butt jointed	Interleaved one per layer
0.1	0.90	0.80
0.2	0.90	0.85
0.35	0.95	0.90

MATERIAL TYPE	THICKNESS(mm)	WEIGHT & NUMBERS	
		GRAMS/PCS	PCS/KG
PB (NI 45~48%)	0.35T	0.9320	1,073